


Approximate Equivalents Kinematic Viscosity to Saybolt Universal Viscosity at 100°F, Industrial Fluid Lubricants

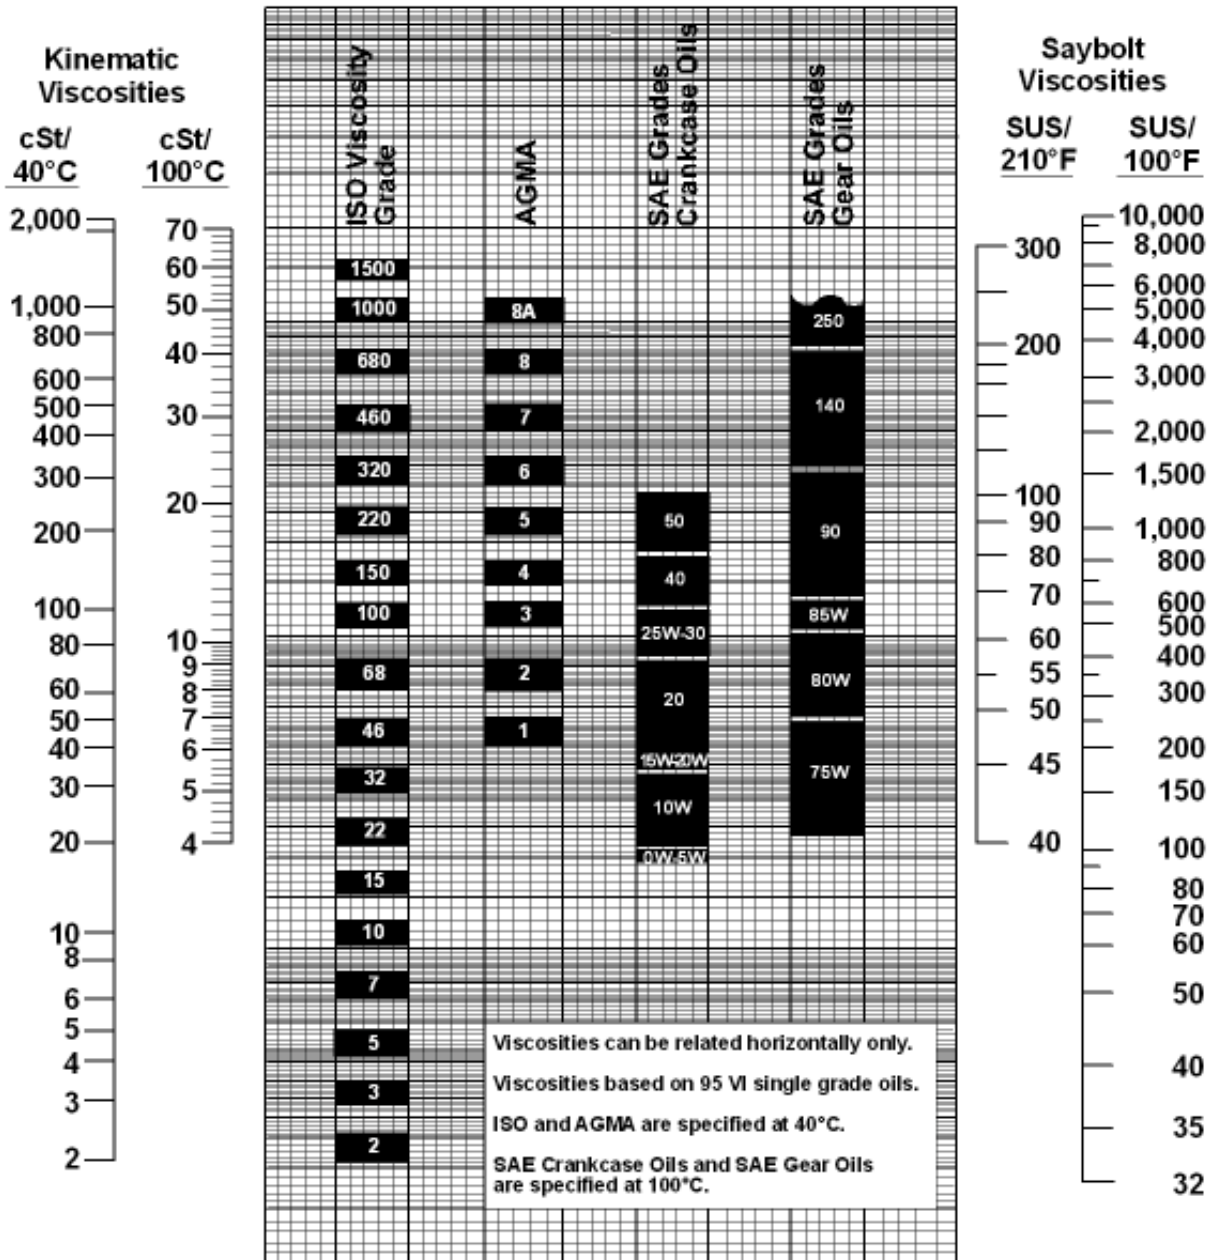

To obtain approximate conversions, use the following conversion factors. Refer to ASTM D2161 for exact values:

Saybolt, SUS = Kinematic, cSt x 4.6

Kinematic, cSt = Saybolt, SUS / 4.6.